



**Brake Pedal Depressor
CBD600
Operation Instructions**

1. Introduction

The brake pedal application device is intended to be used for the statutory annual MOT testing of class IV, VL and VII vehicles in accordance with the Motor Vehicle (Tests) Regulations 1981, as amended.


! Note: The instructions with regard to health and safety must always be observed without fail

1. Only use the brake pedal application device for purposes of applying the brake and nothing else.
2. Make sure that no oils or solvents are present on the equipment while in use. (Danger of slipping off brake)
3. When the application device is in use, do not stand in front or behind the vehicle, only stand and work on the side.
4. Do not use the device if any part is broken or bent.
5. After application of device and before releasing hand brake, make sure the device is in the correct position on the foot brake pedal.
6. Make sure that the drivers seat is secure and locked into position before applying brake device
7. Before and after installing device, make sure the hand brake is applied.

2. Specifications

Weight	1,500 g
Force application mins	50 kg for minimum of 5 mins
Corrosive resistant	Nickel coated
Length of shaft	72 cm

3. Description

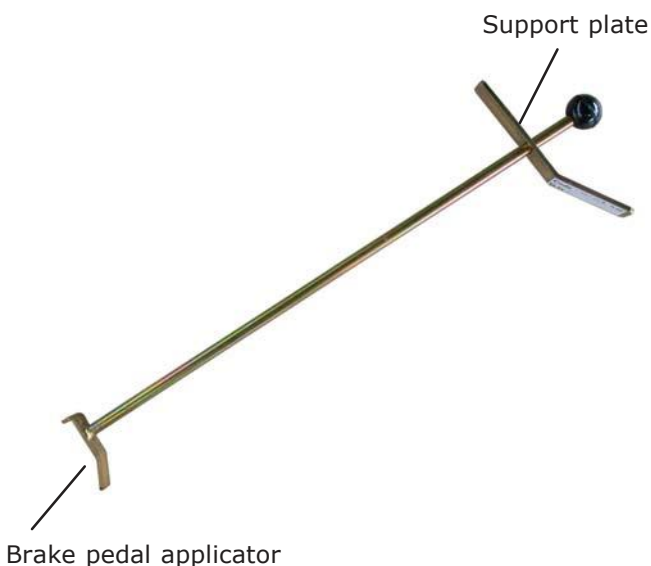

4. Application

The Brake pedal application device has a moveable support plate, which enables it to move the whole distance of 720 mm up and down the shaft. At the bottom of the device is a brake pedal applicator which should fit over the brake pedal with the acute 90° angle at the top and the longer 30° angle connecting to the surface of the brake pedal as shown in the diagram below.



Brake Pedal Application Device

The support plate is then pulled up along the shaft until comes into contact with the front of the seat.

Apply the brake pedal by pushing down on the shaft using the round knob on the end of the shaft to assert pressure on the brake pedal.

Once enough pressure is on the brake pedal to apply the brakes fully, pull up the support plate until it comes into contact with the driver's seat front (check seat is securely locked) and secure the device in place using the back force pressure of the brake pedal to lock the support plate on the shaft with the seat front.

The brake pedal will now be held in a position to hold the brakes as required.

To remove the device, make sure the hand brake has been applied and then push down on the shaft using the round knob on the end of the shaft while easing the pressure off the support plate on the front of the seat. Move the support plate down the shaft and remove the device.

AFTER SALES SERVICE

Apart from the routine maintenance and adjustments stipulated in this manual the equipment must not be tampered with in any way. All further servicing must be carried out only by an engineer from an Authorised Agent. Failure to observe these conditions will invalidate the Guarantee.

On-Site Service / Overhaul / Spare Parts

UK Customers:

If you require a Service Engineer to attend ON SITE, either due to an equipment fault, or for machine calibration, or if the equipment covered by this manual requires to be sent back for factory overhaul, or if you need spare parts, please contact our Product Support Helpline at the following numbers.

Tel: +44(0)844 665 7610

Fax: +44(0)844 665 7604

Email: support@cryptontechnology.com

Overseas Customers

Service abroad is provided by the agent from whom your equipment was purchased.

Technical Information

Crypton provide information and contracts covering:

Car Data, Fault Code Information, Diagnostic Information, Software Support Contracts, Software Updates & Accessories.

Crypton Ltd. Hopton Industrial Estate, London Road, Devizes, Wiltshire SN10 2EU

Tel: +44 (0) 844 665 7613

Fax: +44 (0) 844 665 7604

Email: sales@cryptontechnology.com

Website: www.cryptontechnology.com