



# Brake Pedal Depressor CBD600

A2C88534000

## Operating Instructions

I323329 Issue 2



## 1. INTRODUCTION

The brake pedal application device is intended to be used for the statutory annual MOT testing of class IV, VL and VII vehicles in accordance with the Motor Vehicle (Tests) Regulations 1981, as amended.

**NOTE:**


**The instructions with regard to health and safety must always be observed without fail.**

1. Only use the brake pedal application device for purposes of applying the brake and nothing else.
2. Make sure that no oils or solvents are present on the equipment while in use. (Danger of slipping off the brake)
3. When the application device is in use, do not stand in front or behind the vehicle, only stand and work on the side.
4. Do not use the device if any part is broken or bent.
5. After application of device and before releasing hand brake, make sure the device is in the correct position on the foot brake pedal.
6. Make sure that the drivers seat is secure and locked into position before applying brake device.
7. Before and after installing device, make sure the hand brake is applied.

## 2. SPECIFICATIONS

<b>Weight</b>	1,500g
<b>Force application</b>	50kg
<b>Corrosive resistant</b>	Nickel coated
<b>Length of shaft</b>	72cm

## 3. DESCRIPTION

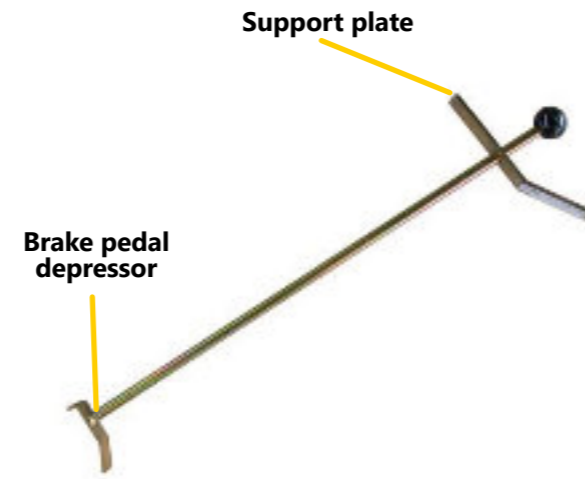

## 4. APPLICATION

The Brake pedal application device has a movable support plate, which enables it to move the whole distance of 720mm up and down the shaft. At the bottom of the device is a brake pedal applicator which should fit over the brake pedal with the acute 90° angle at the top and the longer 30° angle connecting to the surface of the brake pedal as shown in the diagram below.



The support plate is then pulled up along the shaft until it comes into contact with the front of the seat. Apply the brake pedal by pushing down on the shaft using the round knob on the end of the shaft to assert pressure on the brake pedal.

Once enough pressure is on the brake pedal to apply the brakes fully, pull up the support plate until it comes into contact with the driver's seat front (check seat is securely locked) and secure the device in place using the back force pressure of the brake pedal to lock the support plate on the shaft with the seat front.

The brake pedal will now be held in a position to hold the brakes as required.

To remove the device, make sure the hand brake has been applied and then push down on the shaft using the round knob on the end of the shaft while easing the pressure off the support plate on the front of the seat. Move the support plate down the shaft and remove the device.

## 5. AFTER SALES SERVICE

Apart from the routine maintenance and adjustments stipulated in this manual the equipment must not be tampered with in any way. All further servicing must be carried out only by an engineer from an Authorised Agent. Failure to observe these conditions will invalidate the Guarantee.

■ **On-Site Service / Overhaul / Spare Parts**

If you require a Service Engineer to attend ON SITE, either due to an equipment fault, or for machine calibration, or if the equipment covered by this manual requires to be sent back for factory overhaul, or if you need spare parts, please contact our Product Support Department.

■ **Outside UK mainland**

Service for export customers are provided by the agent from whom your equipment was purchased

■ **UK After-Sales Service**

Call Crypton Support for details of local service agents.

## 6. CONTACT DETAILS

■ **SALES**

**Tel:** 0121 725 1400

**Email:** sales@cryptontechnology.com

■ **SUPPORT**

**Tel:** 0121 725 1366

**Email:** support@cryptontechnology.com


Continental Automotive Trading UK Ltd.  
36 Gravelly Industrial Park  
Birmingham B24 8TA  
United Kingdom  
www.cryptontechnology.com

**Crypton - A Brand of the Continental Corporation**

E & O E. The Company reserves the right to introduce improvements in design or specification without prior notice.

The sale of this product is subject to our standard terms, conditions and relevant product warranty.

Continental Automotive Trading UK Ltd, 36 Gravelly Industrial Park, B24 8TA  
Tel: 0121 725 1230 | Email: sales@cryptontechnology.com | Web: www.cryptontechnology.com  
**Crypton - A brand of the Continental Corporation**



E & O E. The Company reserves the right to introduce improvements in design or specification without prior notice.

The sale of this product is subject to our standard terms, conditions and relevant product warranty.

